


B

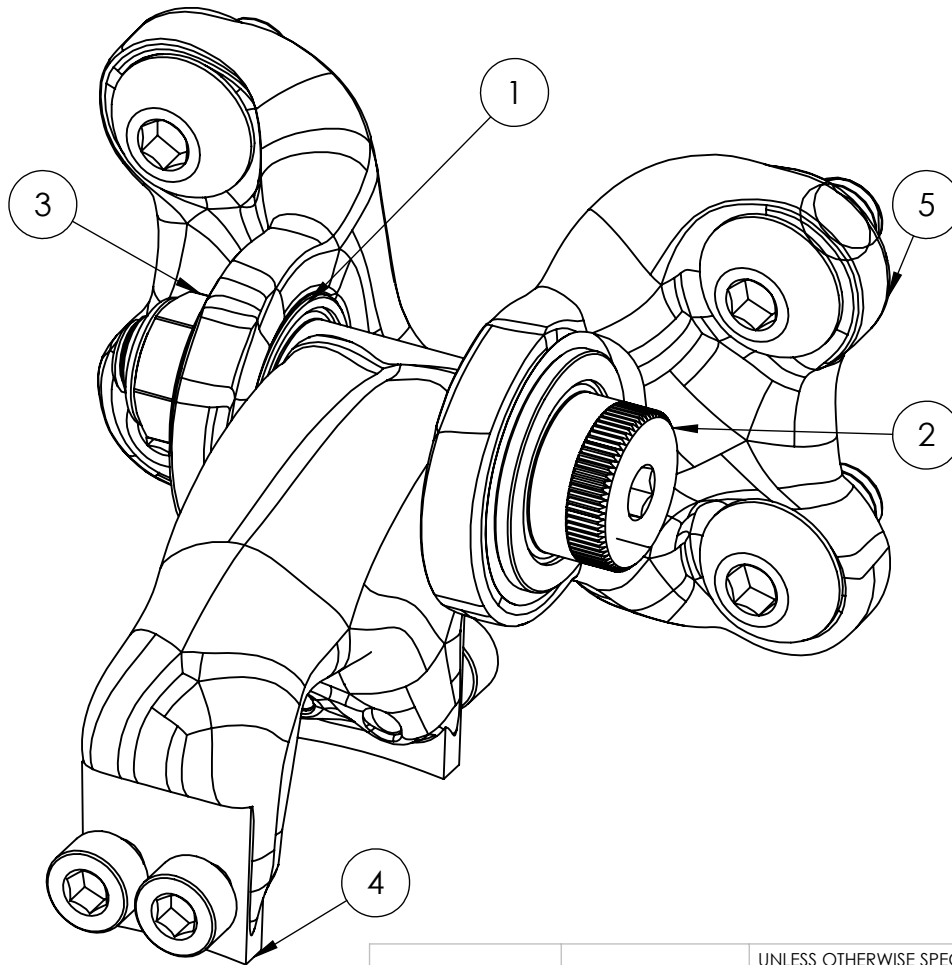

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	57155K588	Flanged Ball Bearing	2
2	92981A103	Alloy Steel Shoulder Screws	1
3	94645A102	High-Strength Steel Nylon-Insert Locknut	1
4	HipAbdBracketMotorSide2	Motor Side Bracket	1
5	HipAbdBracketHipSide1	Hip Side Bracket	1
8	91239A224	Button Head Hex Drive Screw	4
9	91290A111	Alloy Steel Socket Head Screw	4

B

A

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <INSERT COMPANY NAME HERE>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <INSERT COMPANY NAME HERE> IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:
		DIMENSIONS ARE IN INCHES
		TOLERANCES:
		FRACTIONAL \pm
		ANGULAR: MACH \pm BEND \pm
		TWO PLACE DECIMAL \pm
		THREE PLACE DECIMAL \pm
		INTERPRET GEOMETRIC TOLERANCING PER:
		MATERIAL
		FINISH
NEXT ASSY	USED ON	
APPLICATION		DO NOT SCALE DRAWING

	NAME	DATE
DRAWN	RJS	11/3
CHECKED		
ENG APPR.		
MFG APPR.		
Q.A.		
COMMENTS:		

TITLE:

Topology Optimized Ver.1

SIZE	DWG. NO.	REV
A	Abduction Bracket Subassembly	
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1

A